

## Type

**T2****I<sub>max</sub> : 40 kA****U<sub>p</sub> : 1,8 kV**

## System

**TNC : 400/690 V**  
**IT : 230/400 V**

**IEC 61643-11**  
**EN 61643-11**

Type 2 SPD's are designed to discharge the currents generated by indirect lightning strikes causing induced or conducted overvoltages on the power distribution network.

They are characterized by an 8/20μs waveform (I<sub>max</sub>). Higher is the I<sub>max</sub>, more powerful they are.

They are installed in the main distribution switchboard but also in sub-distribution board.

They have a low residual voltage U<sub>p</sub> often compatible with the withstand voltage of the equipment to protect. If this is not the case or the cable length to the equipment is longer than 10m, another level of coordination with OVR T2-T3, OVR T3 will be needed.

- Din rail mounting
- Pluggable
- Excellent technical data
- Improved safety
- Pro M compact design
- Back up protection up to 125 A Fuse or Mcb



## Key characteristics

Protection mode	L-PEN		
Number of protected lines	3		
Test class	II		
Integrated thermal disconnecter	Yes		
End of life indicator	Yes		
Safety reserve	No		

## Electrical characteristics

Nominal discharge current	I <sub>n</sub> (8/20)	kA	20
Maximal discharge current	I <sub>max</sub> (8/20)	kA	40
Impulse current	I <sub>imp</sub> (10/350)	kA	2
Maximal continuous operating voltage	U <sub>c</sub>	V	440
Type of current / frequency		Hz	a.c. 47-63
Voltage protection level at I <sub>n</sub>	U <sub>p</sub> (L-PE)	kV	1,8
Voltage protection level at I <sub>n</sub>	U <sub>p</sub> (L-N)	kV	-
Voltage protection level at I <sub>n</sub>	U <sub>p</sub> (N-PE)	kV	-
Short circuit withstand	I <sub>SCCR</sub>	kA	100
Total current	I <sub>TOTAL</sub>	kA	120
Follow current interrupted	I <sub>fi</sub>	kA	- / -
Ground residual current	I <sub>PE</sub>	μA	< 210
TOV withstand (L-N : 5s / N-PE : 200 ms)	U <sub>T</sub>	V	581 / -
Voltage Combination Wave	U <sub>OC</sub>	kV	20

## Required thermal/back up protection

Curve B or C Circuit breaker	A	≤ 125
gG - gL fuse	A	≤ 125

## Comments


## Mechanical characteristics

Dimensions	H x W x D	mm	88 x 53.4 x 58
Wire range : Solid wire		mm <sup>2</sup>	2.5...25
Wire range : Stranded wire		mm <sup>2</sup>	2.5...16
Stripping length		mm	12.5
Packing quantities		piece	Per 1


## Miscellaneous characteristics

Maximal altitude	m	2000
Weight	g	360
Response time	ns	< 25
Fire resistance according to UL 94		V-0
Replacement cartridges		
Phase / Product ID	OVR T2 40-440 C QS	2CTB803876R0400
Neutral / Product ID	-	-




## INSTALLATION



## DIAGRAM

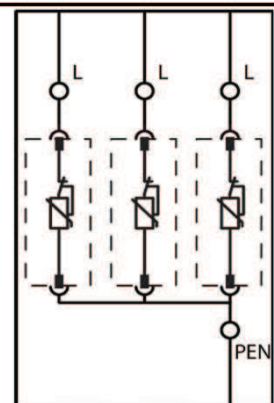

## CHARACTERISTICS



**Dette produktet**  
**kan kjøpes fra:**

**Holte**  
**Industri a.s**

[www.holteindustri.no](http://www.holteindustri.no)  
 Håtteitvegen 13, 3810 Gvarv  
 Tlf. 35 95 93 00

Power and productivity  
 for a better world™

